


Model A-209-W-NS Series

Vacuum Relief Valve

August 13, 2015

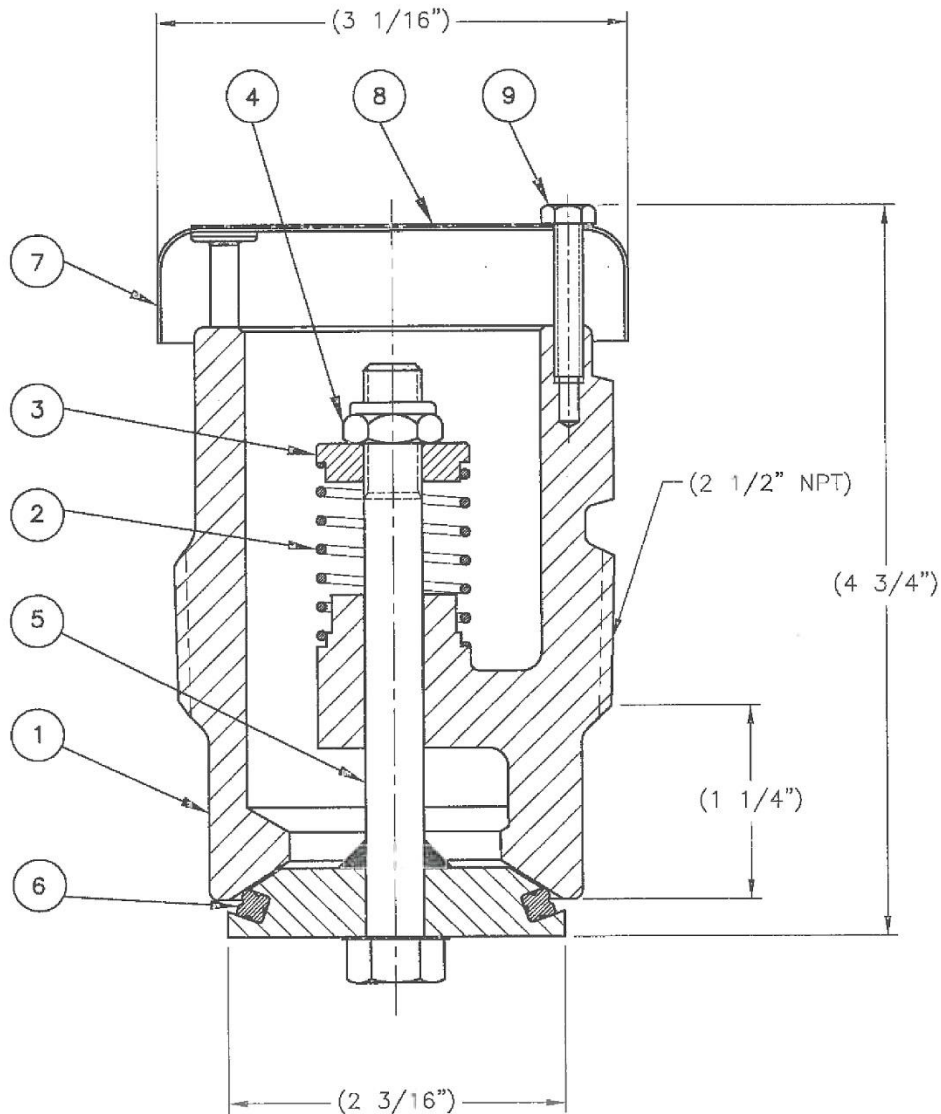

Item	QTY	Part Name	A-209-W-NS		A-209-W-NS-MO	
			Material	Part No.	Material	Part No.
1	1	BODY	STAINLESS	209-14-SS	STAINLESS	209-14-MO
2	1	SPRING	STAINLESS	207-2-MO	STAINLESS	207-2-MO
3	1	SPRING SEAT	STAINLESS	207-3-SS	STAINLESS	207-3-SS
4	1	LOCK NUT	STAINLESS	207-41-SS	STAINLESS	207-41-SS
5	1	STEM ASM	STAINLESS	207-52-MO	STAINLESS	207-52-MO
6	1	PRESSURE SEAL	BUNA N (1)	205-6-BN	BUNA N (1)	205-6-BN
7	1	WEATHER CAP ASM	STAINLESS	209-7-SS	STAINLESS	209-7-SS
8	1	NAMEPLATE	STAINLESS	209-88-SS	STAINLESS	209-88-SS
9	3	CAP SCREW	STAINLESS	208-9-SS	STAINLESS	208-9-SS

NOTES:

- ALTERNATE MATERIAL AVAILABLE
- STANDARD MINIMUM START TO DISCHARGE PRESSURE SETTING IS 0.75 PSI VACUUM. ALTERNATE START TO DISCHARGE PRESSURE SETTINGS ARE AVAILABLE
- NET FLOW AREA : 1.12 SQUARE INCHES
- AAR APPROVAL # E102007