


Model A-17250-T-A Series

Top Style Pressure Relief Valve with Frangible Disc

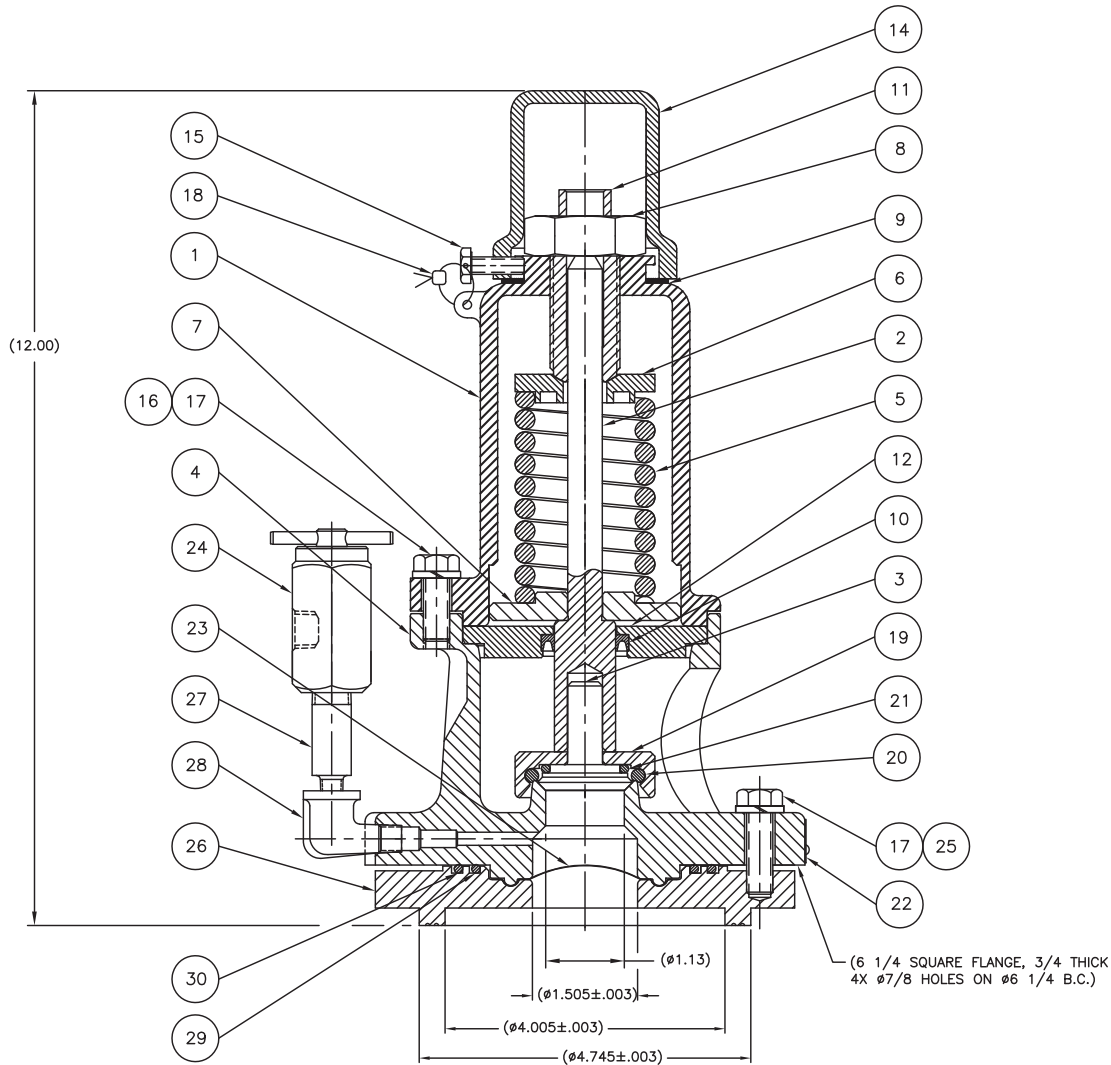

Item	Qty	Part Name	Material	Part No.
1	1	Top Guide	Steel	15-1-CS
2	1	Stem	Stainless Steel	17-2-SS
3	1	Plug	Stainless Steel	17-3-SS
4	1	Body	Steel	15-44-CS
5	1	Spring	Stainless Steel	15-300-SS
6	1	Follower	Steel	14-6-CS
7	1	Guide	Stainless Steel	15-7-SS
8	1	Top Nut	Steel	15-8-CS
9	1	Top Gasket	Buna-N	15-9-BN
10	1	Shaft Seal	Teflon	17-10-TF
11	1	Adjustment Screw	Stainless Steel	15-11-SS
12	1	Seal Retainer	Steel	17-12-CS
13				
14	1	Cap	Stainless Steel	15-14-SS
15	1	Hex Head Cap Screw	Steel	15-15-CS
16	3	Hex Head Cap Screw	Steel	15-16-CS
17	5	Lock Washer	Steel	15-17-CS
18	1	Wire Seal	SS Wire, Lead Seal	22-72-PB
19	1	Retainer	Stainless Steel	17-19-SS
20	1	Seat "O"-Ring	Buna-N (*)	10-10-BN
21	1	Plug "O"-Ring	Buna-N (*)	10-11-BN
22	1	Nameplate	Stainless Steel	17-252-SS
23	1	Rupture Disc	Stainless Steel (*)	14-23-MO-250
24	1	1/4" NPT Needle Valve	Stainless Steel	A-253-SS
25	2	Hex Head Cap Screw	Stainless Steel	17-31-SS
26	1	Rupture Disc Flange	Steel	17-342-CS
27	1	Nipple	Stainless Steel	421-SS
28	1	90° Street Elbow	Stainless Steel	421-1-SS
29	1	Flange "O"-Ring, Inner	Buna-N (*)	32-11-BN
30	1	Flange "O"-Ring, Outer	Buna-N (*)	14-331-BN

NOTE: (*) Alternate material available.

PRESSURE SETTING: Rupture Disc: 250 PSIG
Pressure Relief Valve: 237 PSIG

FLOW RATE: 3368 SCFM Air
based on certified capacity of 247.5 PSIG S-T-D
and flow rating pressure of 272 PSIG