


Materials

68EZSB-7575

Body: Aluminum
Sleeve: Nylon
Seals: Nitrile
Poppet: Acetal, Aluminum
Packed: 20 per Case

66SB-1010

Body: Aluminum
Sleeve: Nylon, HDPE
Seals: Viton®
Poppet: Aluminum
Packed: 20 per Case

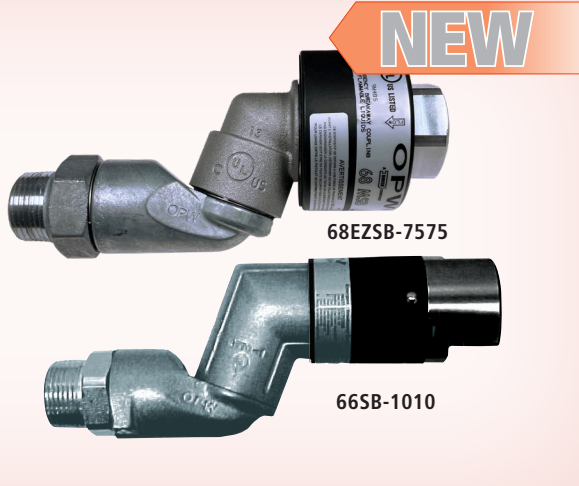


Features

- ◆ New 68EZSB-7575 has enhanced swivel capability and is even easier to reconnect.
- ◆ UL and ULc-listed for use in gasoline, diesel and up to 10% ethanol blends. Specific listings available at www.opwglobal.com.
- ◆ Pull Force – the 68EZSB and 66SB will break away with a pull force of no more than 350 lbs.
- ◆ Easily Reconnected at Waist Height – after relieving line pressure, simply push coupling halves together until latched. Reconnection force is approximately 5 lbs for the 68EZSB and 15 lbs for the 66SB.

- ◆ Protected Coupling and Poppet – the breakaway’s poppet and sealing surface are protected from impact during separation by a plastic sleeve.
- ◆ Reduces Connections – the single-unit design replaces the standard swivel, breakaway and whip hose, eliminating possible leak points.

Design working pressure

- ◆ 50 psi (3.45 bar) maximum pressure.

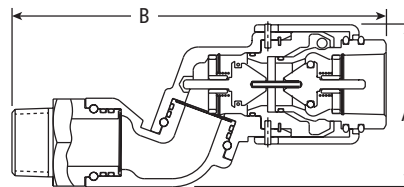

Ordering Specifications

Product #	Size	Weight	
		lbs.	kg
68EZSB-7575	3/4" x 3/4" (NPT)	2	0.91
66SB-1010	1" x 1" (NPT)	1.82	0.83

Dimensions

Product #	A		B	
	in.	mm	in.	mm
68EZSB-7575	2.49"	64	6.31"	160
66SB-1010	3.34"	85	8.5"	216

66SB Instruction Sheet Order Number: F-69

68EZSB Instruction Sheet Order Number: 216700

Listings and Certifications



OPW Swivel Breakaways

OPW Swivel Breakaways are intended for easy installation at the nozzle inlet. The compact, lightweight designs incorporate a 360° swivel rotation at both the male end and middle joint, with a simple and easily reconnectable breakaway on the opposite end.

